


Type : **PQ2615-V65-1SM1**

- ✦ High Efficiency and Low Loss
- ✦ Acc. To DIN EN 62368-1
- ✦ UL94-V0 Recognized Materials
- ✦ Class 130°C Insulation System
- ✦ Operating Temperature -40°C to +100°C
- ✦ RoHS Compliant Product
- ✦ Custom Design Available



Electrical Specifications	Core Parameters	Bobbin Parameters
Max. Output Power (at 66kHz) Flyback : 30 W Half-Bridge : - - Operating Frequency : 20 - 140 kHz Isolation (pri-sec) : 3.000 Vrms, 1mA / 5 sec.	Core Type : PQ2615 Effective Length (le) : 39,1 mm Effective Area (Ae) : 122,0 mm ² Effective Volume (Ve) : 4450 mm ³	Core Direction : Vertical Number of Pins : 6+5 Max. Winding Width : 6,4 mm Max. Winding Height : 3,5 mm Winding Area : 22,4 mm ²

Dimensions [mm]

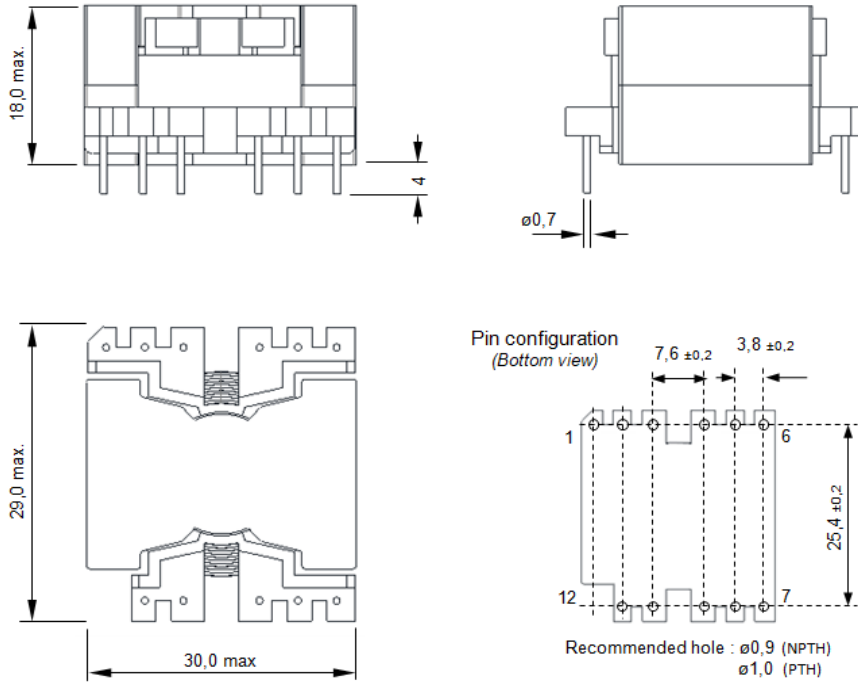

The parameters of the product are given as an example. Data are subject to change without prior notice.

Revised : 20-Jan-2022